



‘Cool’ green display – more calming to customers, especially positive in health care applications.

Clear distinction – noticeably distinguish between adjacent services with a different display colour.

Enhanced visibility – even visually impaired customers will see the difference.

- ❖ Large, evenly lit 7-segment digits. Non-reflecting front panel minimises glare from ambient lighting and improves digit contrast.
- ❖ Operates on safe, low-voltage power. Low power consumption, plus SLEEP mode for less than 1 Watt power use in standby mode.
- ❖ Compatible with all older V2 systems, available with plug-in adapters for connection to existing cables.
- ❖ Clean, unobtrusive form with finely textured, quality surface finish.
- ❖ Includes bracket for wall mounting and eyelets for optional ceiling hanging.
- ❖ Easy plug-in connections to all current V3 systems.


Available products:

Indicator ING903




Includes ‘NOW SERVING’ text decals in several languages and mounting bracket with screws & wall plugs.

Indicator pack ING903 V2service

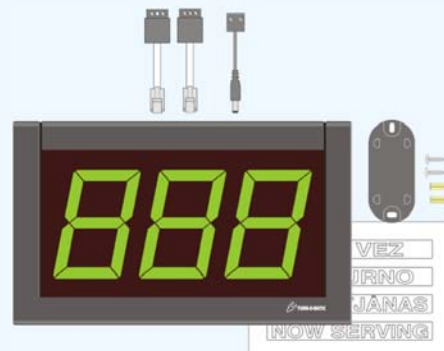

Includes ‘NOW SERVING’ text decals in several languages, mounting bracket with screws & wall plugs and plug-in V2 cable adapters.

**Also, applicable system
START & PLUS packs**

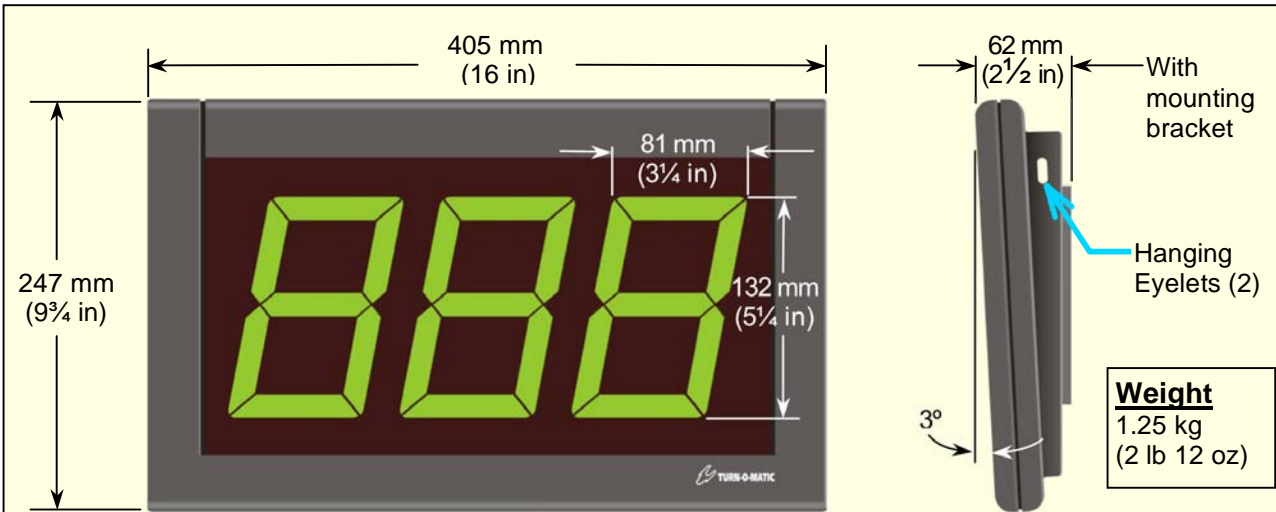
Materials

Housing: ABS, UL listed
 Colours; Green (RAL6024), Red (RAL3000)
 Blue (RAL5015), Yellow (RAL1021), White (RAL9016)
 Black (RAL9005), Grey (RAL7040)
 Front Panel: Polymethyl methacrylate (MMA), UL listed
 Segment reflectors: ABS, UL listed

Electrical Requirements

Voltage: 12VAC (+/- 10% max), 50/60 Hz.
 Alternatively 15VDC (+/- 10% max).
 Consumption: 9.6 Watts ('888' lit, medium sound)
 2.7 Watts ('111' lit, no sound)
 0.6 Watts (stand-by, SLEEP mode)

Connections & Settings (backside)
